


AudioSimplified **Eight IN**

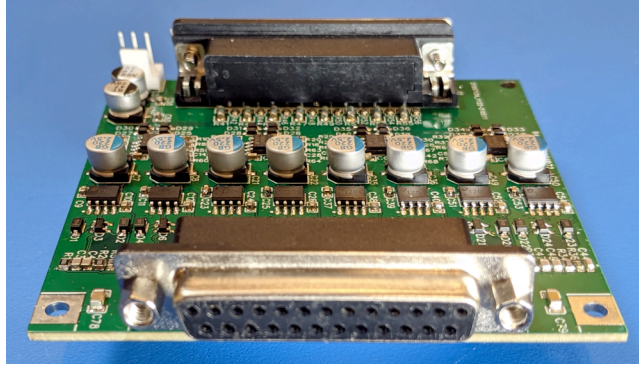

Eight Channel balanced to unbalanced buffer pcb for console rebuilders/diy

- THAT 1200 Series **InGenius**™ Balanced Line Receiver ICs
- Eight electronically balanced inputs.
- Eight unbalanced outputs.
- Gain structure is set during assembly,
Common configuration examples:
+4dBu input; -2dBu output
+4dBu input; -10dBv output
Other configurations are available, including different gains
for each channel.
- Inputs and outputs are on standard pinout db-25's for easy
interfacing.

Specifications

Nominal Input Level : +4dBu

Maximum Input level: +24dBu

UnBalanced Output maximum level: +22dBm into 600Ω

Frequency Response: 20hZ to 20kHz +0.01dB,-0.11dB

Noise: -90.5 dBa

Distortion: THD: .00847%

IMD: .011%

Power: ±15-20vDC regulated, 80ma

Dimensions: length:3.15"(80mm), width:3.15"(80mm), height:.79"(20mm)

Price: \$150.00

©2021 Audio Simplified LLC, Jim Mikles
6401 Hickory Overlook, Columbia, MD 21044
audio-simplified.com 410.999.0918